




Ridoir standard oeil-oeil / Standard eye-eye rigging screw

Description	Ridoir standard oeil-oeil Tube étiré sans soudure
<i>Description</i>	<i>Standard eye-eye- rigging screw Elongated tube with no welding</i>
Matière	Corps et tige en acier doux Finition galvanisation
<i>Material</i>	<i>Mild steel body and jaw ends Galvanised finish</i>
Normes	Coefficient de sécurité : 1:5
<i>Standards</i>	<i>Safety factor : 1:5</i>

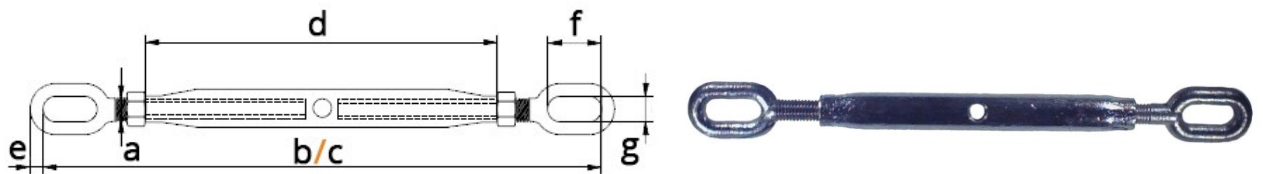

CMU WLL (t)	Diamètre Diameter (mm)	Longueur max/ min Length max/min (mm)		Poids Weight (kg)
	a	b	c	
0,25	8	171	251	0,205
0,4	10	221	325	0,320
0,5	12	276	413	0,585
0,8	14	341	516	1,035
1	16	392	592	1,400
1,5	18	436	652	2,030
1,8	20	452	688	2,420
2	22	503	753	3,200
2,6	24	520	780	4,150
3,2	27	567	842	5,300
4	30	597	879	6,800
4,5	35	702	982	10,050
6,8	40	804	1114	14,800