



Ridoir standard chape-oeil / Standard jaw-eye rigging screw

Description Ridoir standard chape-oeil
Tube étiré sans soudure


Description *Standard jaw-eye rigging screw*
Elongated tube with no welding

Matière Corps et tige en acier doux
Finition galvanisation

Material *Mild steel body and jaw ends*
Galvanised finish

Normes Coefficient de sécurité : 1:5

Standards *Safety factor : 1:5*

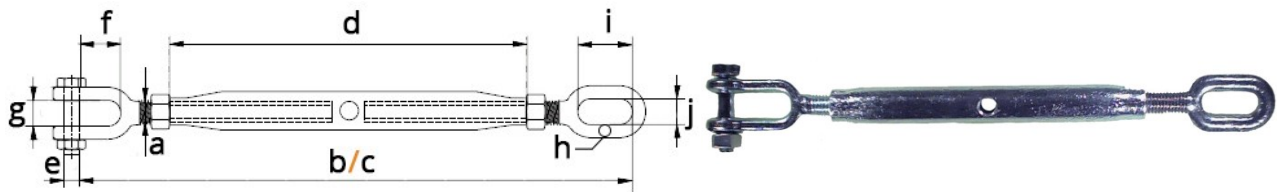

CMU WLL (t)	Diamètre		Longueur max/ min		Dimensions						Poids Weight (kg)
	Diameter		Length max/min		Dimensions						
	a	b	c	d	e	f	g	h	i	j	
0,25	8	176	256	103	6	22	10	6	20	8	0,205
0,4	10	226	330	144	8	26	12	8	25	10	0,320
0,5	12	278	415	179	10	32	14	11	30	12	0,585
0,8	14	345	520	219	12	34	16	12	35	14	1,035
1	16	391	591	255	14	38	20	14	40	16	1,400
1,5	18	438	654	276	16	46	21	14	45	18	2,030
1,8	20	464	700	295	16	52	25	16	50	20	2,420
2	22	504	754	316	18	51	27	16	55	22	3,200
2,6	24	521	781	337	20	57	30	18	60	24	4,150
3,2	27	568	843	352	22	61	30	20	65	27	5,300
4	30	608	890	365	24	76	35	22	75	30	6,800
4,5	35	707	987	390	27	80	38	25	82	35	10,050
6,8	40	808	1118	435	36	98	46	32	97	40	14,800