




Anneau de levage femelle DIN 582 / Lifting eye bolt DIN 582

Description	Anneau de levage femelle Inox Marquage \emptyset , CE, CMU, fabricant, matière, numéro de lot
<i>Description</i>	<i>Lifting eye bolt in stainless steel Marking \emptyset, CE, WLL, manufacturer, material, batch number</i>

Matière	Acier Inoxydable AISI 316 estampé
<i>Material</i>	<i>Stamped stainless steel AISI 316</i>

Normes	Dimensions conformes à DIN 582 Coefficient de sécurité : 1:5 Filetage ISO
<i>Standards</i>	<i>Dimensions according to DIN 582 Safety factor : 1:5 ISO tapping</i>

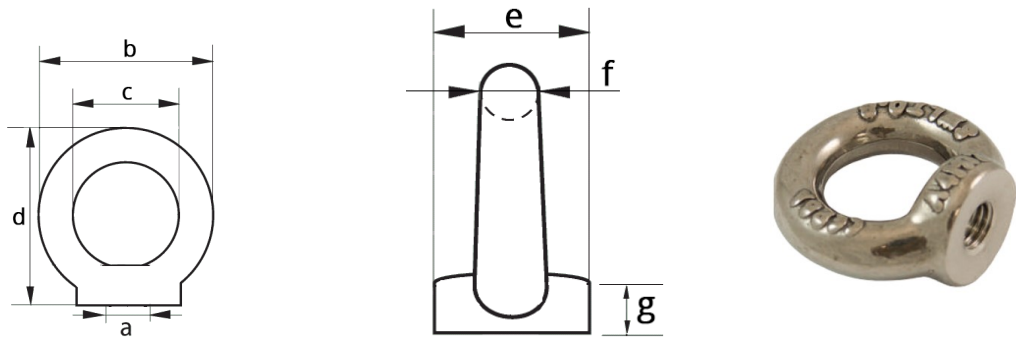

Réf. / Code	CMU <u>WLL</u> (kg)	Dimensions <u>Dimensions</u> (mm)						
		\emptyset a	b	c	d	e	f	g
105 355	180	M06	36	20	36	20	8	8.5
105 356	300	M08	36	20	36	20	8	8.5
105 357	500	M10	45	25	45	25	10	10
105 358	800	M12	54	30	53	30	12	11
105 359	1100	M14	54	30	53	30	12	11
303 745	1500	M16	63	35	62	35	14	13
306 200	2400	M20	72	40	71	40	16	16
307 336	3600	M24	90	50	90	50	20	20
310 489	2500	M27	90	50	90	50	20	20