

Antichute de charge fixe / Fixed load arrester



Description
Description

Antichute de charge fixe, suspendu ou fixé au sol
 Reprise de chute limitée (<100 mm), réarmement simple et réalisable immédiatement après l'arrêt d'une chute
 Le support sur lequel est fixé l'antichute doit être dimensionné pour supporter une force verticale équivalente à 8 fois la charge sécurisée

*Fixed load arrester, suspended or fixed to the ground
 Falling load quickly stopped (<100 mm), easy to use and immediately re-usable after stopping a fall
 The supporting structure must be dimensioned to be able to support a vertical force at least equivalent to 8 times the weight of the secure load*

Normes
Standard

Équipement conforme à la Directive Machine Européenne 2006/42/CE
Complies with the European Machinery Directive 2006/42/CE

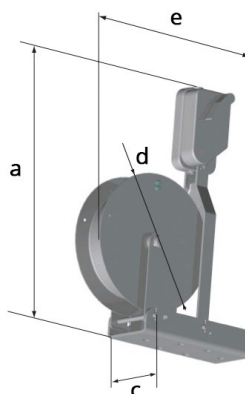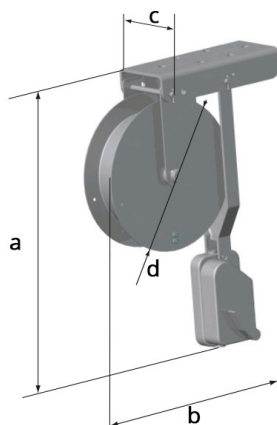

RÉF. / CODE	Capacité Capacity (kg)	Long. câble Wire rope length (m)	Diam. câble Wire rope diam. (mm)	Dimensions Dimensions (mm)				Poids Weight (kg)
				a	b	c	d	
Version suspendue / Suspended version								
Réf. disponibles sur demande Codes available on demand	500	15	6.5	715	500	190	300	29
	500	25	6.5	715	580	190	400	40
	800	10	8.4	753	580	190	400	35
	800	20	8.4	753	580	190	400	43
	1000	8	9.5	753	580	190	400	35
	1000	12	9.5	753	580	190	400	42
Version fixée au sol / Version fixed to the ground								
Réf. disponibles sur demande Codes available on demand	500	15	6.5	715	550	190	300	29
	500	25	6.5	715	640	190	400	39
	800	15	8.4	753	640	190	400	36
	800	25	8.4	753	640	190	400	45
	1000	10	9.5	753	640	190	400	36
	1000	25	9.5	753	640	190	400	47